


Product Data Sheet

TMR sensor chip

Product Series: FFZ-001F58T22H TMR sensors

Part Number: FFZ-001F58T22H

Version: Ver 1.1

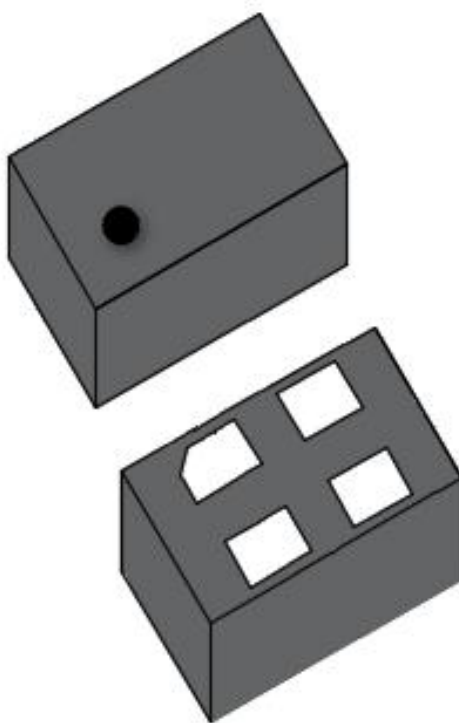

CONTENTS

1. General Description	3
2. Key Features	3
3. Typical Application	3
4. Absolute Maximum Parameters	3
5. Magnetic recommended Operating Condition	4
6. Electrical Characteristics	4
7. Internal circuit and Pin direction	5
8. Typical output curve	5
9. Power-on response time	6
10. Output bandwidth	6
11. Typical output response time	7
12. Package information	8
13. Product packaging	9
14. Reflow Profile (Reference)	10

1. General Description

FFZ-001F58T22H TMR sensor is Tunneling Magneto Resistance (TMR) sensor which consists of 1 Wheatstone bridges in a DFN0805-4L package. The sensor detects vertical magnetic field strength. This sensor is suitable for position sensing in mobile applications.

2. Key Features

- Magnetic TMR sensor, employing the TMR effect.
- Compatible with a wide range of supply voltages
- Superior temperature stability
- 1 full bridge in DFN0805-4L package.
- High output signal without amplifier.

3. Typical Application

- Magnetic field strength sensing in OA/mobile module
- Position sensing for camera module

4. Absolute Maximum Parameters

Parameter	Symbol	Limit value	unit
Supply voltage	Vcc	5	V
Input current	I _c	0.5	mA
ESD (Human Body Model).	ESD(HBM)	2	kV
Storage temperature	Tstg	-40 ~ +85	°C
Operating temperature	Topt	-40 ~ +85	°C
Reflow temperature	T _{reflow}	260	°C

Remark: When the operating conditions of the product exceed the limit parameters, it may cause irreparable damage to the product. Working at the limit parameters for a long time may lead to a decline in product performance and product reliability.

5. Magnetic recommended Operating Condition

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Magnetic field Range Z	Bz	-150	—	150	mT	Z-axis(sensing axis):Detection range
Magnetic field Range Y	By	-200	—	200	mT	Y-axis(shielded axis):Shield limitation
Magnetic field Range X	Bx	-50	—	50	mT	X-axis(shielded axis):Shield limitation

6. Electrical Characteristics

Conditions (unless otherwise noted): Vcc = 1 V; Hext = 30 mT; T_{opt} = 25°C.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit	Remarks
Operating voltage	Vcc		—	1	5	V	
Between Vcc and GND resistance	Rs	Bz=0mT	5	10	15	kOhm	
Sensitivity (Difference)	Sen	Bz=±50mT	-1.4	-1.0	-0.7	mV/V/mT	1)
Difference between the mid voltages of two outputs	offset	Bz=±50mT	-20	—	20	mV/V	2)
Resistance Temp.Coefficient	TC_R	TL=25°C TH=65°C	—	-0.05	—	%/K	3)
Sensitivity Temp.Coefficient	TC_Sen	TL=25°C TH=65°C	—	-0.01	—	%/K	4)
Offset Temp.Coefficient	TC_off	TL=25°C TH=65°C	—	-0.01	—	%/K	5)

Remark:

$$1) \text{ Sen} = \frac{[V1_{\max} - V2_{\max}] - [V1_{\min} - V2_{\min}]}{H_{\max} - H_{\min}}$$

V1_{max}/V2_{max}=Vout1/Vout2 output voltage at H_{max}; V1_{min}/V2_{min}=Vout1/Vout2 output voltage at H_{min}

$$2) \text{ Offset} = V_{\text{out1}} - V_{\text{out2}} \text{ @ } B_z = 0 \text{ mT; } V_{\text{cc}} = 1 \text{ V}$$

$$3) \text{ TC}_R = \frac{[R_{s, 65^\circ\text{C}} - R_{s, 25^\circ\text{C}}]}{R_{s, 25^\circ\text{C}} * [65 - 25]}$$

$$4) \text{ TC}_{\text{Sen}} = \frac{[\text{Sen}_{65^\circ\text{C}} - \text{Sen}_{25^\circ\text{C}}]}{\text{Sen}_{25^\circ\text{C}} * [65 - 25]}$$

$$5) \text{ TC}_{\text{Off}} = \frac{[\text{Offset}_{65^\circ\text{C}} - \text{Offset}_{25^\circ\text{C}}]}{\text{Offset}_{25^\circ\text{C}} * [65 - 25]}$$

7. Internal circuit and Pin direction

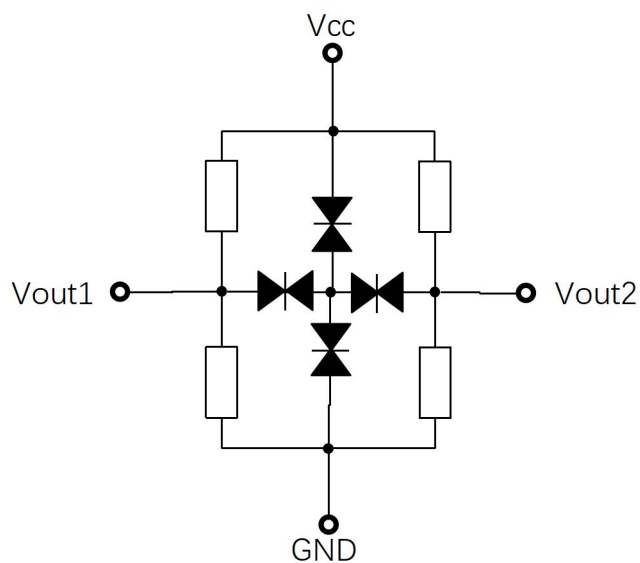


Fig. 1 Schematic diagram of the circuit of the FFZ-001F58T22H sensor.

8. Typical output curve

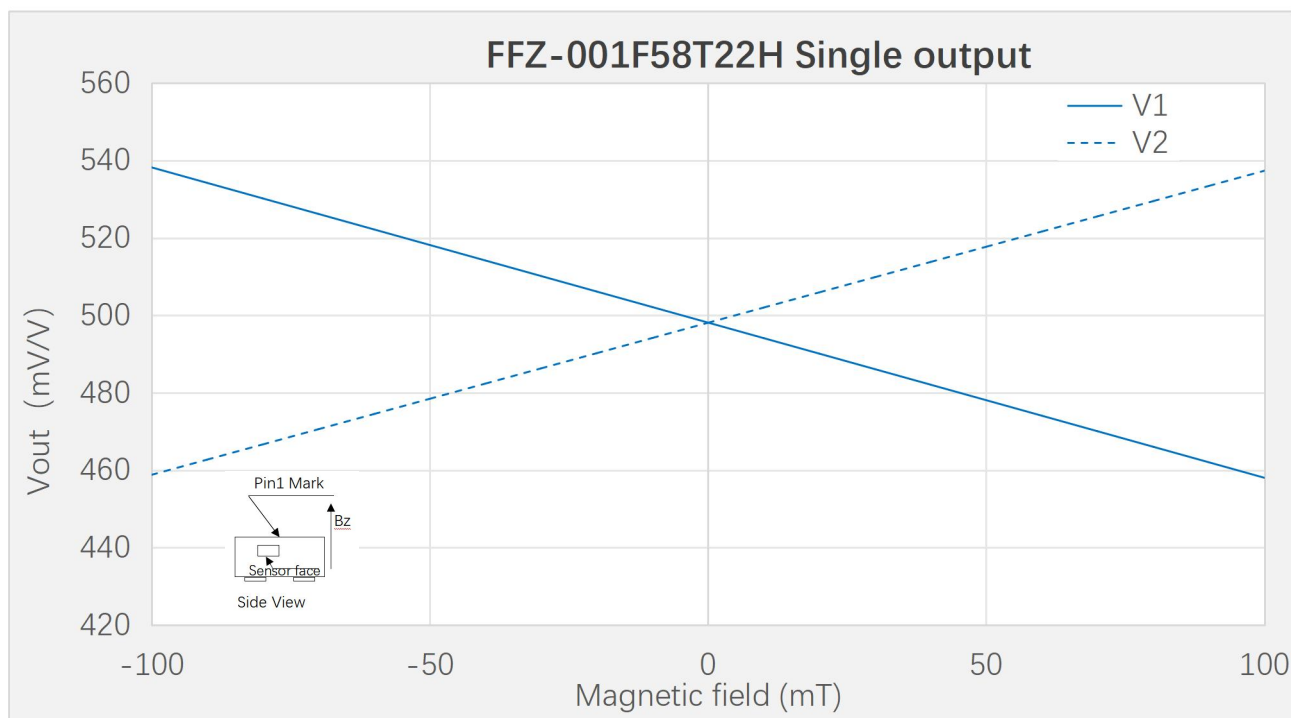


Fig. 2 Signals output voltage of Vout1 and Vout2.

9. Power-on response time

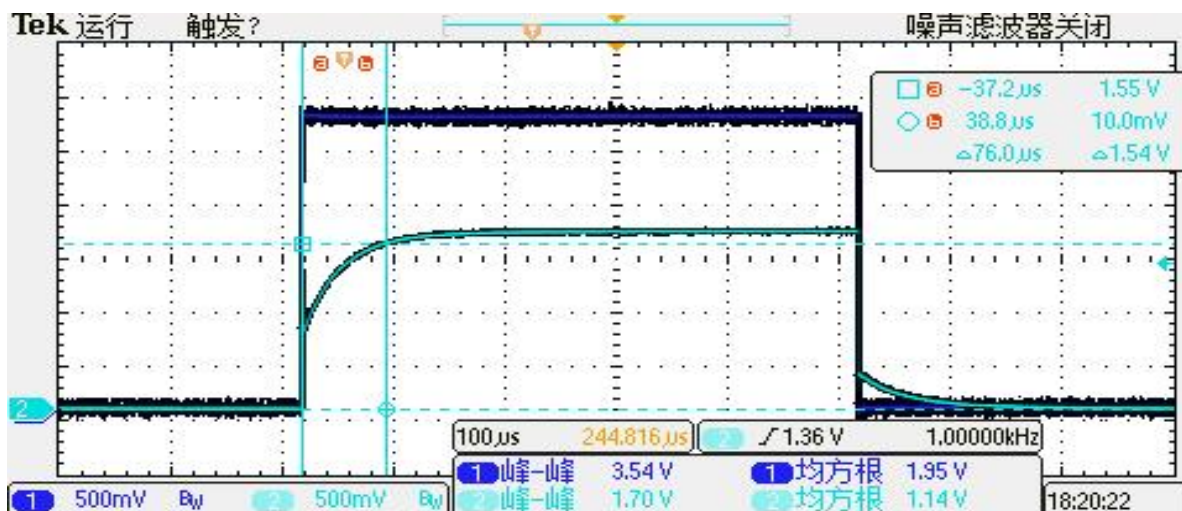


Fig.3 CH1 is Vcc voltage, and CH2 is output voltage; BBT-A907L358D16 series Power-on response time 76 μ s (~100 μ s)

10. Output bandwidth

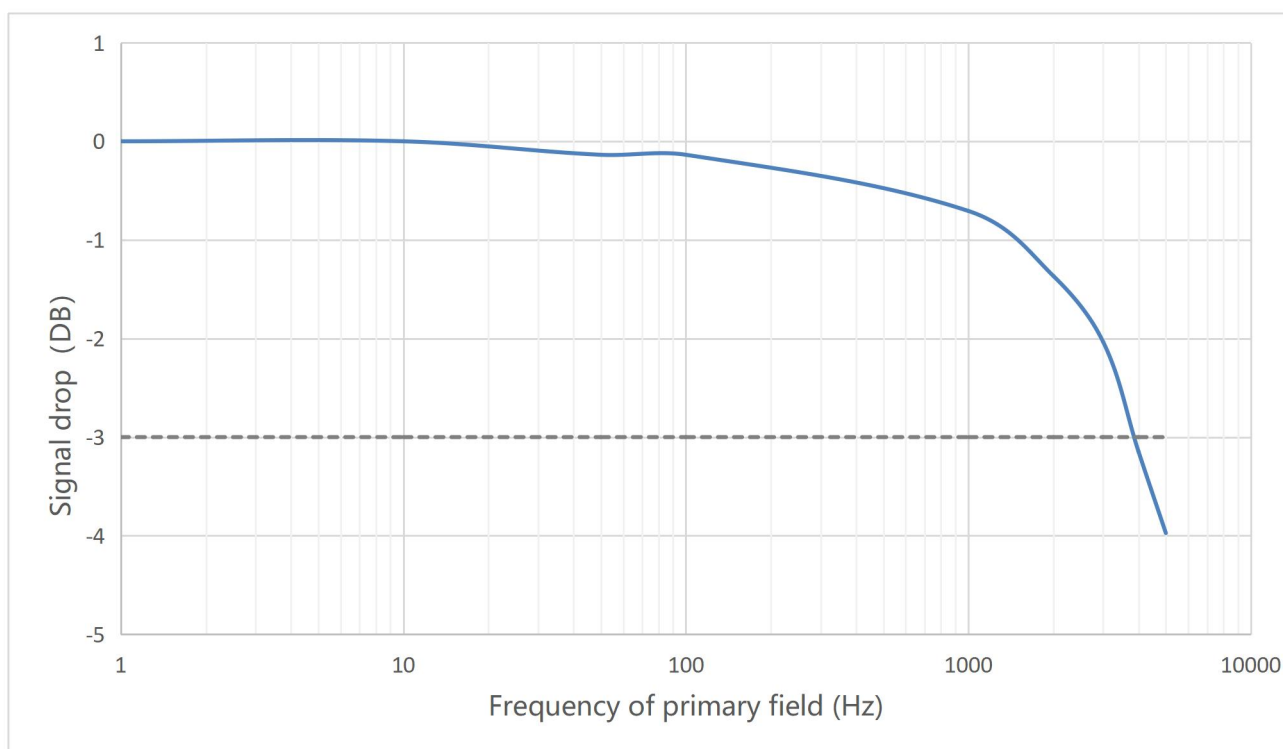


Fig.4 Output bandwidth 4kHz (dB)

11. Typical output response time


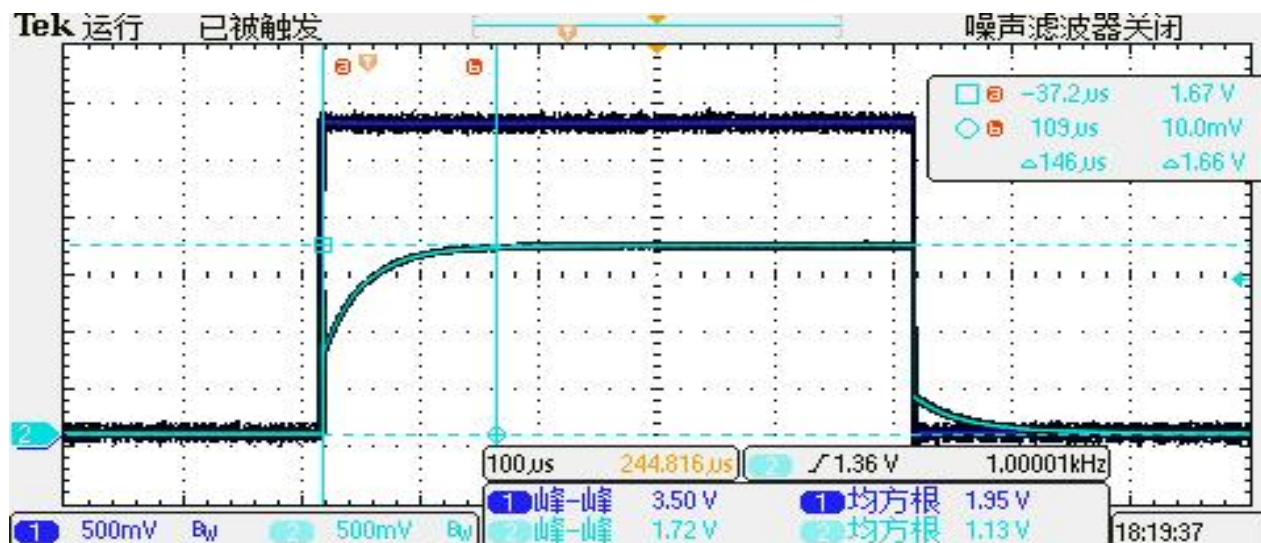


Fig.5 CH1 is primary magnetic field, and CH2 is output voltage; BBT-A907D16JR series output response time is 146 μs (< 150 μs)

12. Package information

12.1 Pin configuration & Pin description

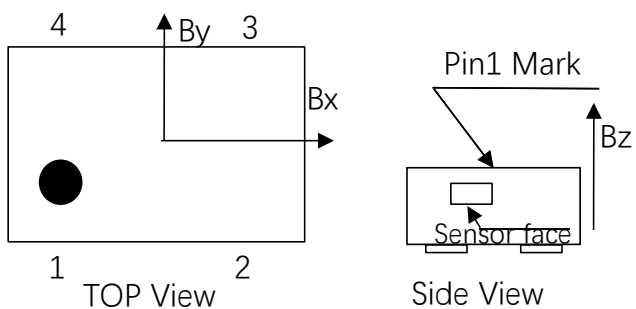

Pin	Symbol	Function
1	Vcc	Supply voltage bridge
2	Vout1	Negative output
3	GND	Ground of bridge
4	Vout2	Positive output

12.2 Package Outline

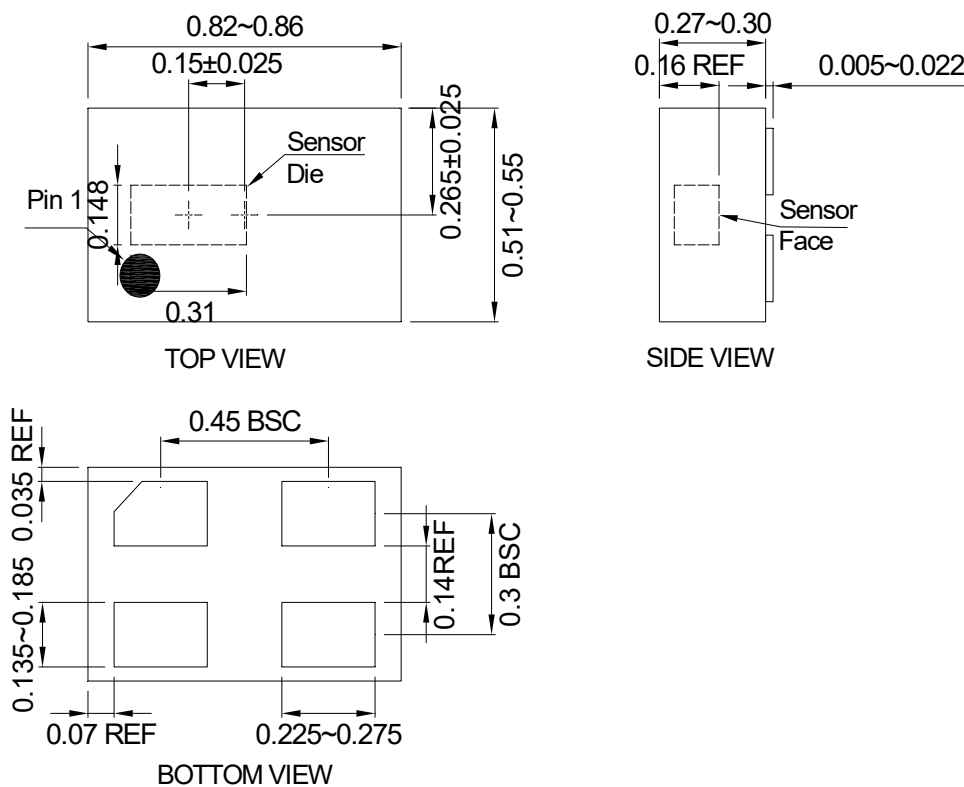


Fig.6 Outline package diagram of FFZ-001F58T22H series sensor (unit: mm).

Note: The pin plating is electroplated tin-plated $\geq 3\mu\text{m}$.

12.3 Footprint

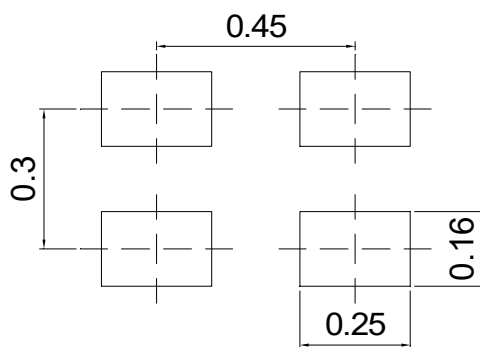


Fig.7 footprint of the sensor chips with this package(unit: mm).

13. Product packaging

Item	Request	Remark
Reels	7 inch	See Figure 6
Carrier tape	8mm wide	See Figure 6
Empty front length	400 mm	Refer to EIA-481 requirements
Trail length	160 mm	Refer to EIA-481 requirements
Number of standard packages	13000 / 7" Reel	Planning criteria for volume products
MSL Level	MSL 3	J-STD-020E


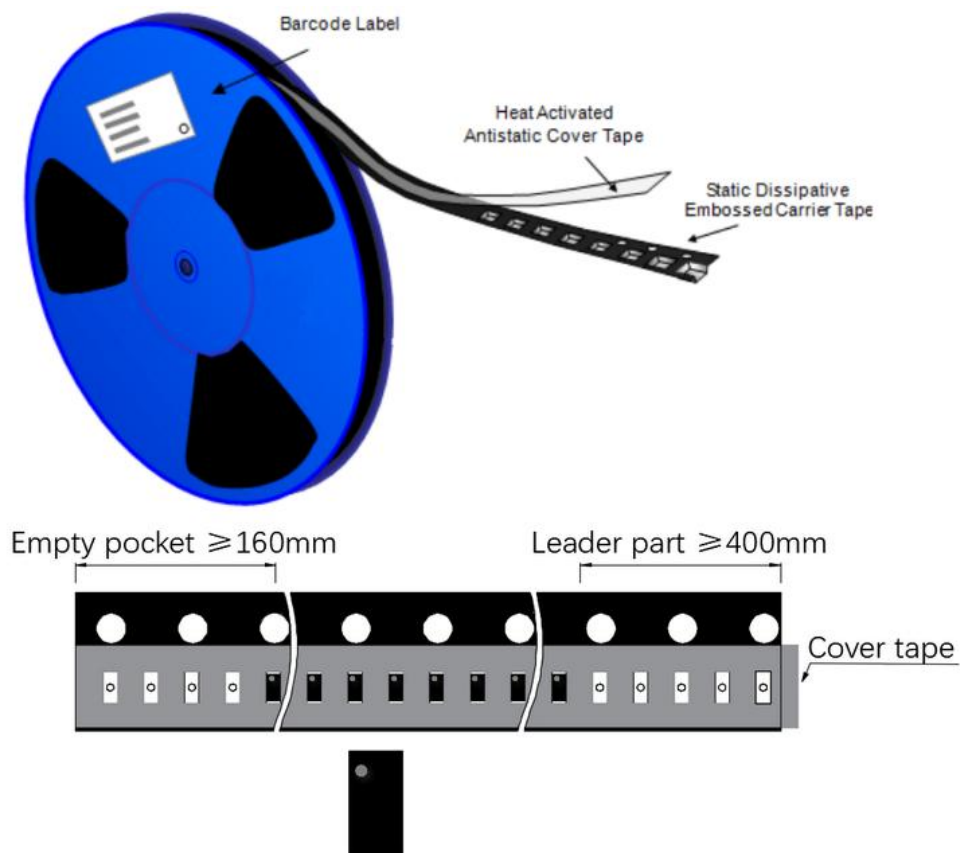


Figure.8 Reels and Carrier tape

14. Reflow Profile (Reference)

Peak Temperature should not exceed 260 degC.

Below Profile is Reference. Please confirm productivity in assembly process.

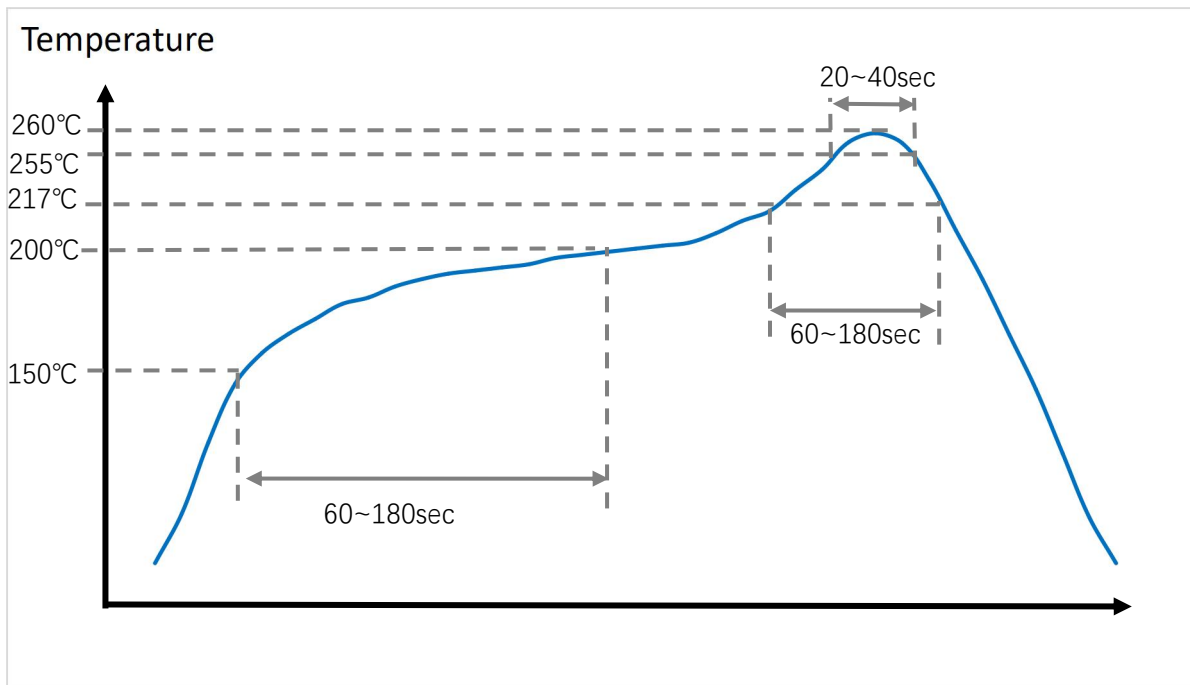

The information provided herein by ESSTMAGS Technology is believed to be accurate and reliable. Publication neither conveys nor implies any license under patent or other industrial or intellectual property rights. ESSTMAGS reserves the right to make changes on product specifications for the purpose of improving product quality, reliability, and functionality. ESSTMAGS does not assume any liability arising out of the application and use of its products. ESSTMAGS's customers using or selling this product for use in appliances, devices, or systems where malfunction can reasonably be expected to result in personal injury do so at their own risk and agree to fully indemnify ESSTMAGS for any damages resulting from such application.