


Product Data Sheet

Angle sensor chip

Product Series: BBT-A903TS8-SM03P angle sensors

Part Number: BBT-A903TS8-SM03P

Version: Ver 1.6.A

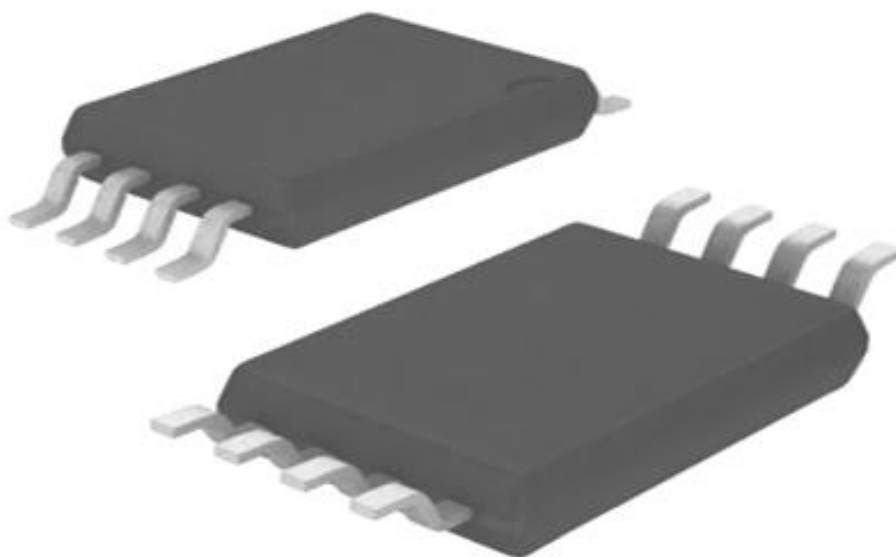

CONTENTS

1. General Description	3
2. Key Features	3
3. Typical Application	3
4. Absolute Maximum Parameters	4
5. Magnetic Data	4
6. Electrical Characteristics	5
7. Accuracy	6
8. Internal circuit and Pin direction	6
9. Typical output curve	7
10. Package information	8
11. Product packaging	10

1. General Description

BBT-A903TS8-SM03P angle sensor is Tunneling Magneto Resistance (TMR) sensor which consists of 2 Wheatstone bridges in a TSSOP8L package. Each Wheatstone bridge has two single ended outputs, one single ended output represents a positive cosine or a positive sine function and the other single ended output represents a negative cosine or a negative sine function. Two sine functions or two cosine functions are both phase-shifted by 120°. The two Wheatstone bridges are phase shifted by 90°.

The output represents sine and cosine functions by applied magnetic field in x-y plane and this sensor can detect 360 deg / 1 rotation. Sine and cosine single ended signals have a layout of 90-deg angle rotation to one another.

2. Key Features

- Magnetic angle sensor, employing the TMR effect.
- Compatible with a wide range of supply voltages
- Low hysteresis
- Superior temperature stability
- Sine and Cosine Outputs (2 times sine and cosine outputs) as single ended outputs
- Differential output also available with improved accuracy

3. Typical Application

- Absolute Rotary Angle Sensor.
- EPS Motor-shaft Angle Sensor.
- Steering Wheel Angle Sensor.
- Pedal Position Sensor.
- Throttle Position Sensor.
- Wiper angle sensor.

4. Absolute Maximum Parameters

Parameter	Symbol	Limit value	unit
Supply voltage	V _{cc}	+5.5	V
ESD (Human Body Model).	ESD(HBM)	4	kV
ESD (Machine Model).	ESD(MM)	0.4	kV
ESD (CDM)	ESD (CDM)	0.5	kV
External magnetic field strength	H _{ext}	200	mT
Storage temperature	T _{stg}	-55 ~ +150	°C
Operating temperature	T _{opt}	-40 ~ +150	°C
Reflow temperature	T _{reflow}	260	°C

Remark: When the operating conditions of the product exceed the limit parameters, it may cause irreparable damage to the product. Working at the limit parameters for a long time may lead to a decline in product performance and product reliability.

5. Magnetic Data

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Magnetic field	H _{ext}		20		130	mT

6. Electrical Characteristics


Conditions (unless otherwise noted): $V_{cc} = 5.0\text{ V}$; $H_{ext} = 30\text{ mT}$; $T_{opt} = 25^{\circ}\text{C}$.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Operating voltage	V_{cc}		1.8	5	5.5	V
Bridge resistance	R_b		3	—	7	kOhm
Single output voltage amplitude	V_{out_single}		125	150	175	mV/V
Differential output voltage amplitude	$V_{out_Differential}$		215	260	305	mV/V
Bias voltage	V_{offset}		-5	—	5	mV/V
Bias voltage single ended	V_{offset_single}	Deviation from $V_{cc}/2$	-5	—	5	mV/V
Temperature Coefficient of differential output	TCV_{out}	$-40^{\circ}\text{C} \sim 150^{\circ}\text{C}$ Hex:20-80mT	-0.25		0	%/K
Bridge resistance temperature drift coefficient	TCR_{bridge}	$-40^{\circ}\text{C} \sim 150^{\circ}\text{C}$ Hex:20-80mT	-0.07	-0.05	-0.03	%/K
Bias voltage temperature drift factor	TCV_{offset}	$-40^{\circ}\text{C} \sim 150^{\circ}\text{C}$	-3	—	3	$\mu\text{V/V/K}$
Amplitude synchronization	k		97	100	103	%

7. Accuracy


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Angle Error (after Compensation)	Angle Error	-40°C~150°C Hex≤40mT			1.5	deg.
		-40°C~150°C Hex≤40~60mT			1.0	
		-40°C~150°C Hex≤60~100mT			0.8	
		-40°C~150°C Hex≤100~130mT			2.0	
Phase difference between sine and cosine	Orthogonality		87	90	93	deg.
Hysteresis error	Accommodated	< 40 mT		0.07		deg.
		40~60 mT		0.05		deg.
		60~100 mT		0.08		deg.
		100~130 mT		0.14		deg.

8. Internal circuit and Pin direction

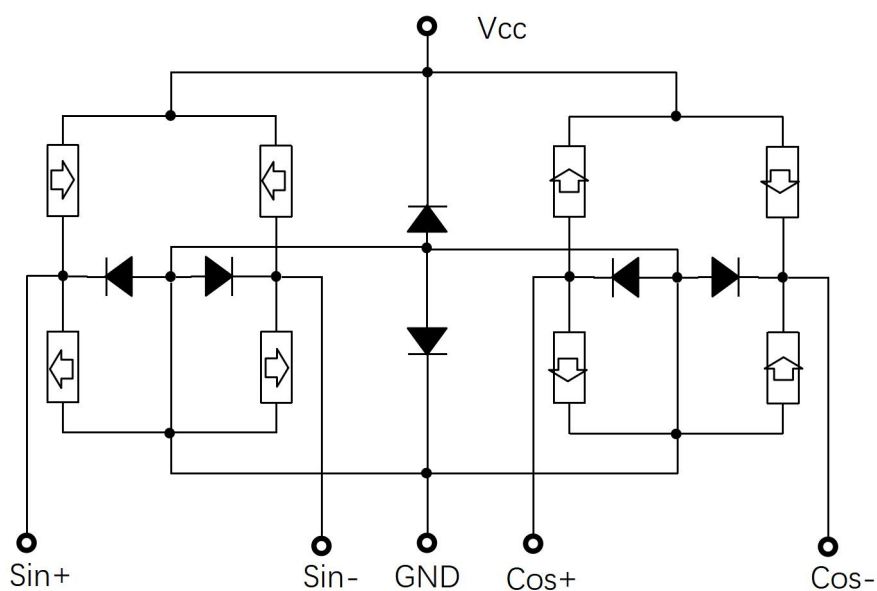


Schematic diagram of the circuit of the BBT-A903TS8-SM03P sensor with independent ground.

9. Typical output curve

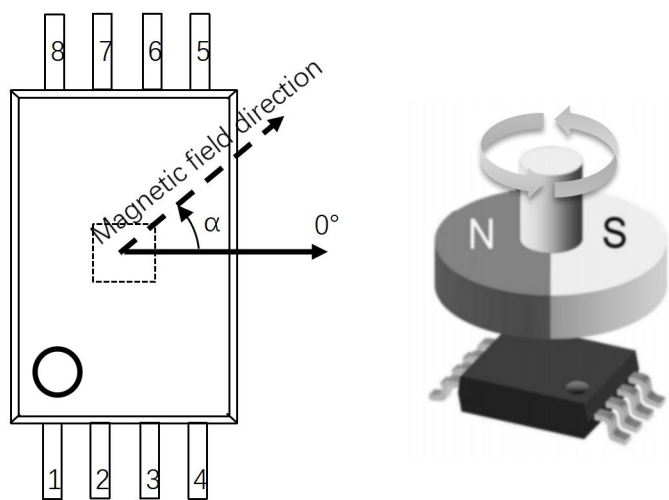


Angle and magnetic field detection direction.

BBT-A903 Differential output

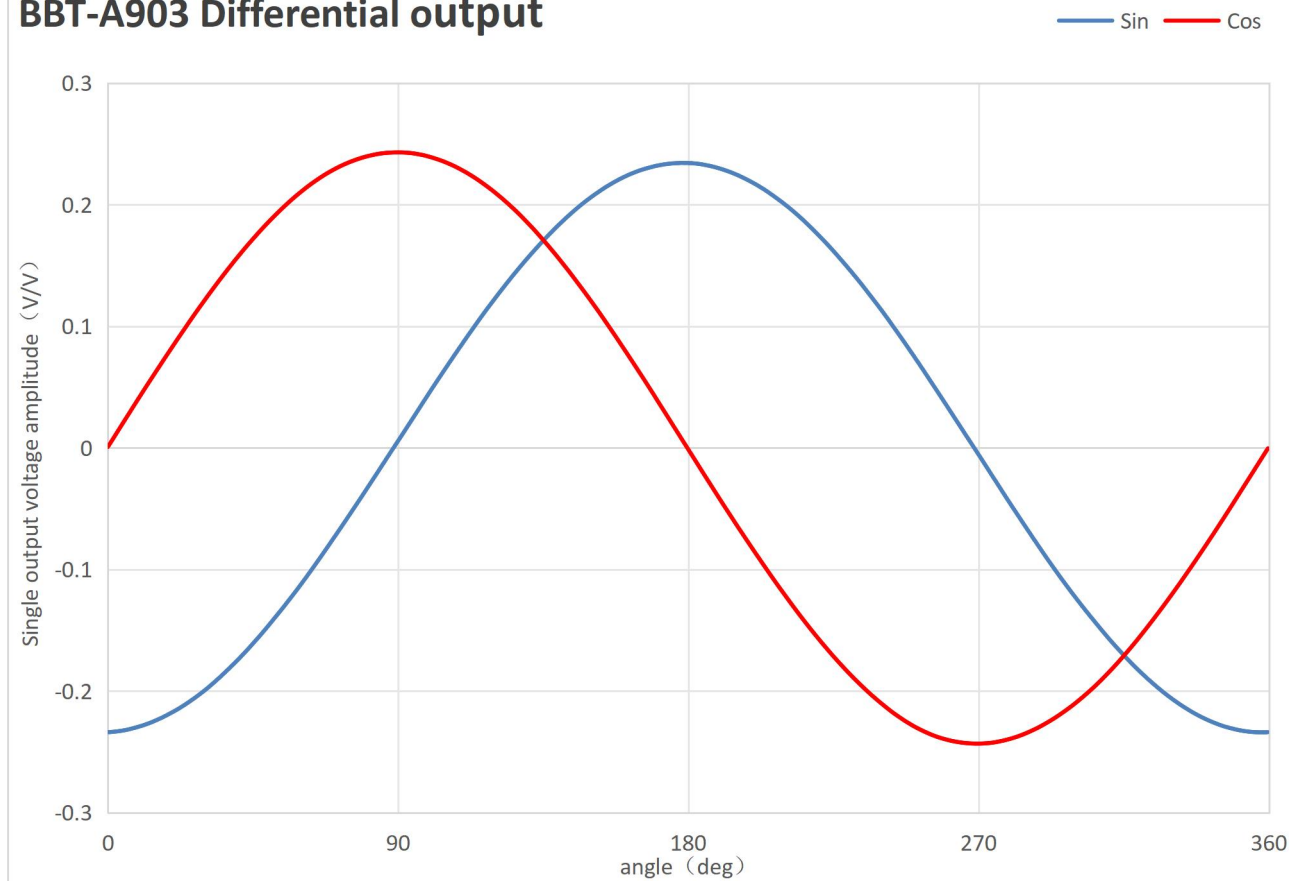


10. Package information

10.1 Pin configuration & Pin description

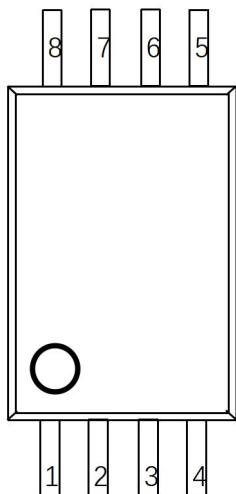

Pin NO.	Symbol	Function
1	SIN-	Analog negative sine output
2	Vcc	Supply voltage of sine and cosine bridge
3	SIN+	Analog positive sine output
4	GND	Ground of sine and cosine bridge
5	COS+	Analog positive cosine output
6	NONE	No contact
7	COS-	Analog negative cosine output
8	NONE	No contact


10.2 Package Outline

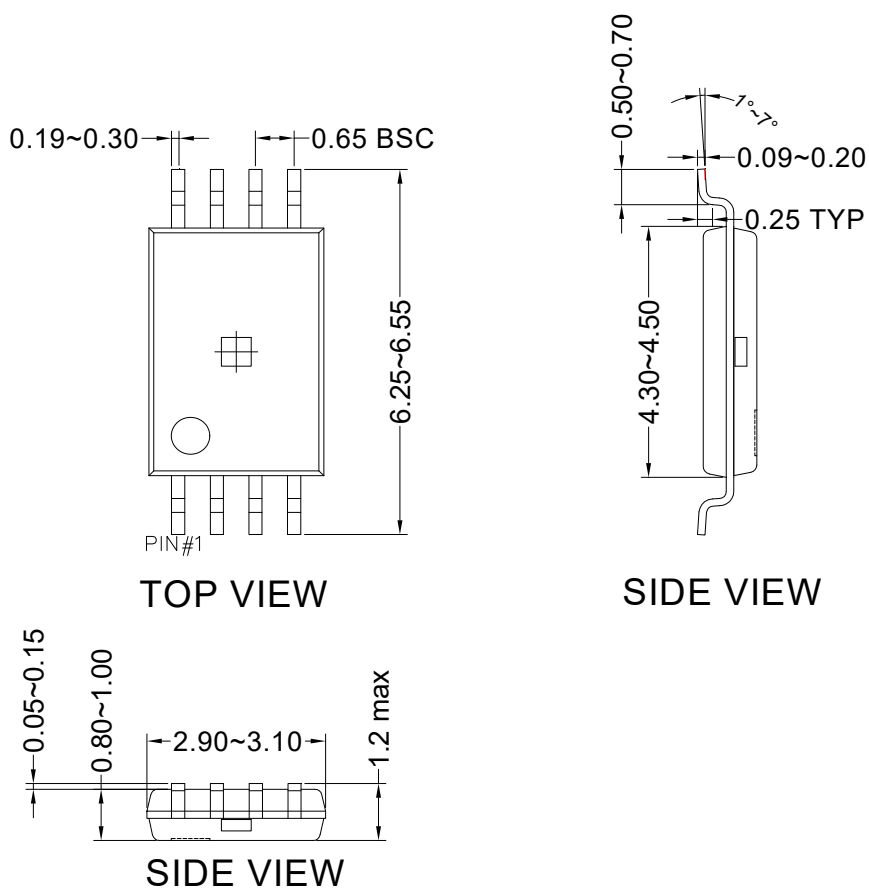

Outline package diagram of BBT-A903TS8-SM03P series sensor (unit: mm).


Note: The pin plating is electroless tin-plated-8 μ m.

10.3 PCB layout

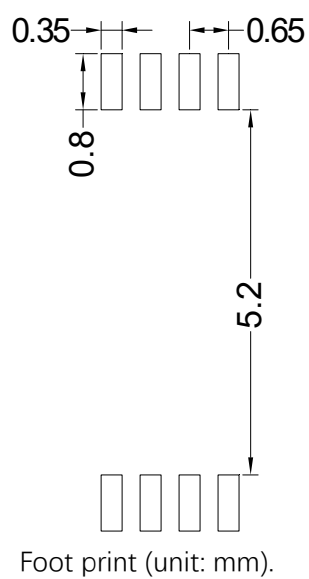

11. Product packaging

Item	Request	Remark
Reels	7 inch / 13 inch	See Figure 6
Carrier tape	12mm wide	See Figure 6
Empty front length	400 mm	Refer to EIA-481 requirements
Trail length	160 mm	Refer to EIA-481 requirements
Number of standard packages	5000 / 13" Reel	Planning criteria for volume products
MSL Level	MSL 1	J-STD-020E

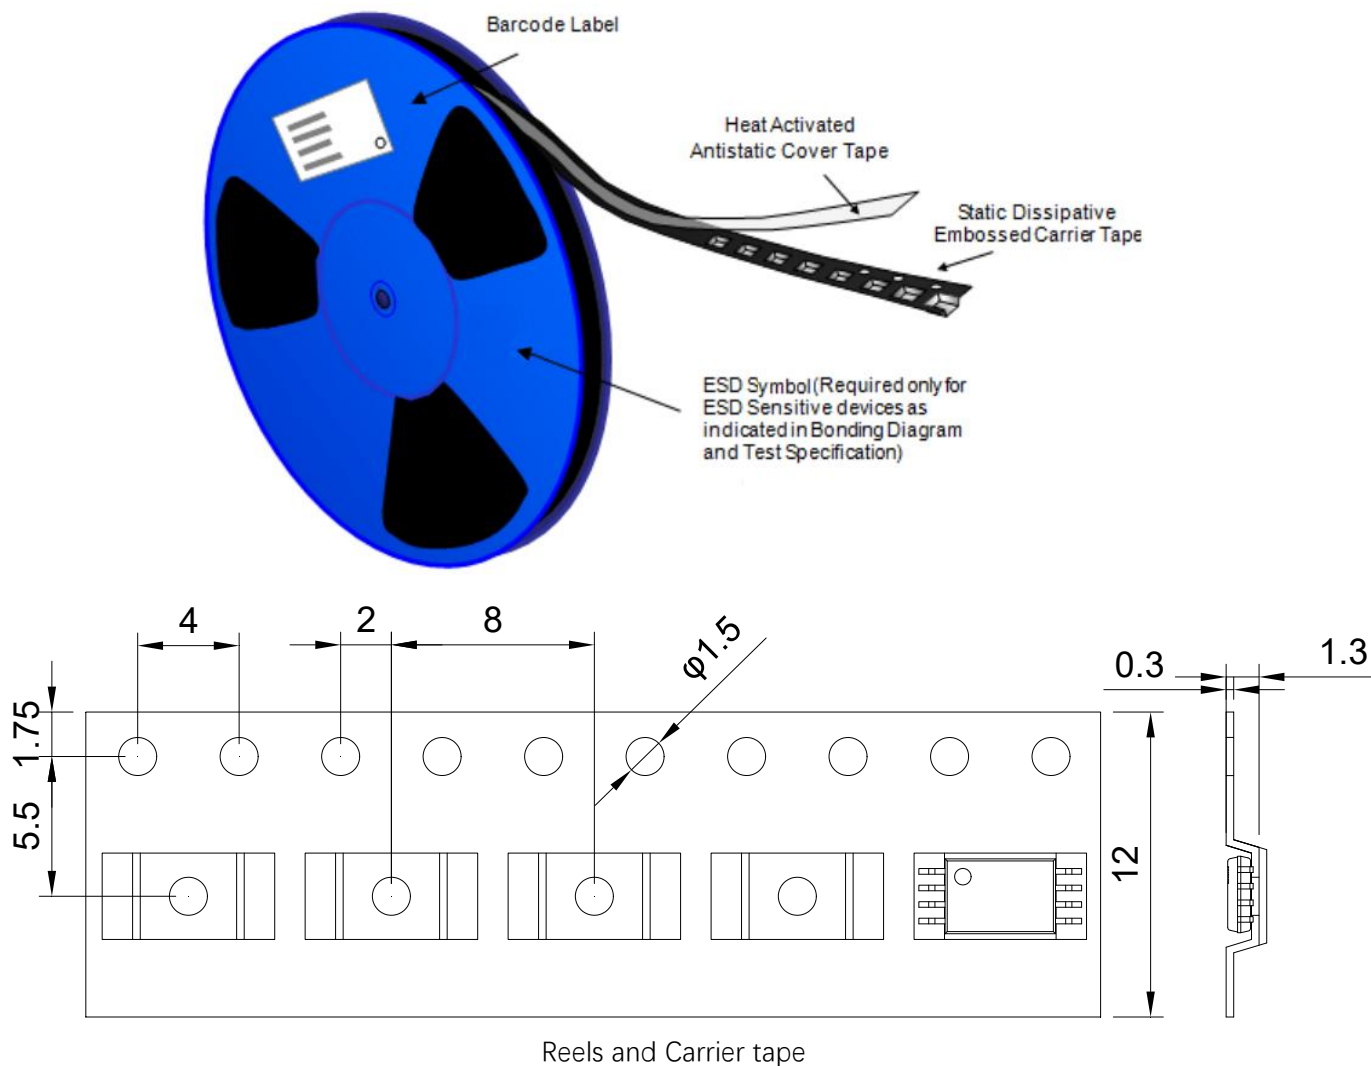

The information provided herein by ESSTMAGS Technology is believed to be accurate and reliable. Publication neither conveys nor implies any license under patent or other industrial or intellectual property rights. ESSTMAGS reserves the right to make changes on product specifications for the purpose of improving product quality, reliability, and functionality. ESSTMAGS does not assume any liability arising out of the application and use of its products. ESSTMAGS's customers using or selling this product for use in appliances, devices, or systems where malfunction can reasonably be expected to result in personal injury do so at their own risk and agree to fully indemnify ESSTMAGS for any damages resulting from such application.